



Features


- Capacity Range: 1 to 20 Ton in stock. Higher capacities available upon request.
- Cast aluminum case, heavy duty hook and ring, and dedicated weighing load cell for strength and durability.
- Quality integrated circuit for high performance and longtime stability.
- Includes Unit Conversion (kgs and lbs).
- Infra-red remote control allows for easy operation of the scale from a distance.
- LED display and idle mode to extend battery life.
- We can customize any product to your specific needs. Contact us to find out how.

General Description

A compact measuring device for weighing loads during lifting. Large bottom hook accommodates various lifting clamps, slings, magnets, etc...

Functions include, but are not limited to, division switching, measurement unit conversion, automatic power save, battery charge status indicator, idle mode, and presentable tare.

DIMENSIONS

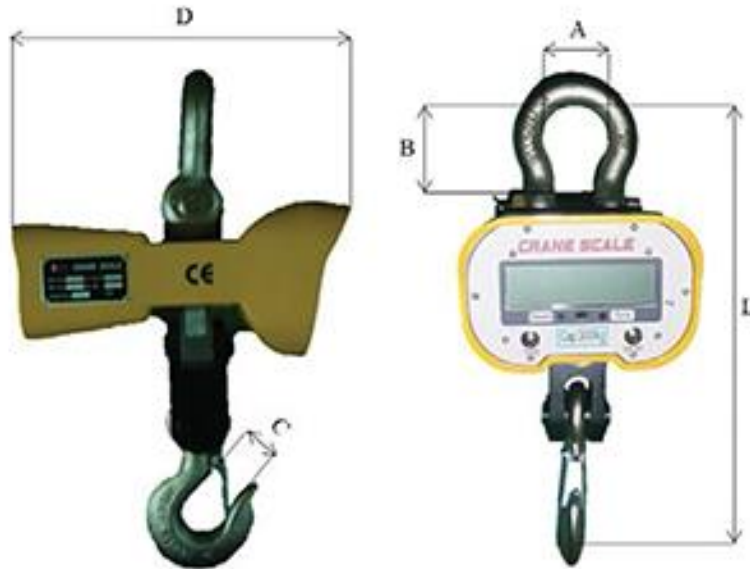

Model Number	Max. Cap. (Ton)	A (in)	B (in)	C (in)	D (in)	L (in)	N.W. (lbs)
HACS-020	1	2.28	3.27	1.18	13	16.54	36
HACS-040	2	2.28	3.27	1.18	13	16.54	36
HACS-060	3	2.87	4.21	1.30	13	18.90	36
HACS-100	5	3.60	5.31	1.77	13	23.03	55
HACS-200	10	3.70	5.71	2.36	14.75	30.31	103
HACS-300	15	5.04	7.01	2.95	14.75	33.86	141
HACS-400	20	5.31	9.84	2.95	14.75	37.40	150

SPECIFICATIONS

Accuracy Class	Chinese GB/T 11883-2002 Class III Equivalent to OIML R76
Tare Range	100% F.S.
Zero Range	4% F.S.
Reading Stable Time	≤10 Seconds
Overload Warning	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Life	80 hours – 200 hours with 6V/10Ah battery 60 hours – 100 hours with 6V/5Ah battery
Scale Battery	6V/10Ah or 6V/5Ah rechargeable battery
Operating Temp.	-10°C - 40°C
Operating Humidity	≤90% at 20°C
Display	1.5 inch (38.1 mm) ultra-luminance LED 1.2 inch (30 mm) ultra-luminance LED