

REMOTE CONTROL SYSTEMS

200 Series

400 Series

500 Series



200 Series

200 Series Remote Control transmitters are available in 2, 4, & 6 button single-speed configurations. A small compact pocket-size transmitter; fully safety-compliant, simple installation, suitable for SUV, Winch, Conveyor, Boat Lifting Equipment, Greenhouse Spreader, etc. The major application will be the vehicle market, especially for tow trucks.

Transmitter Specifications:

L x W X H: 4.72" x 2.17" x 0.98" (120 x 55 x 25 mm)

Weight: 0.34 lbs. (0.2 kg) *with batteries

Two (2) AA size batteries

Receiver Specifications:

L x W X H: 6.34" x 2.91" x 2.05" (161 x 74 x 52 mm)

Weight: 2.43 lbs. (1.1 kg) *without cable

Input Voltage: AC Type: 24/48/110/220/380V;

DC Type: 12~24V

General Specifications:

Frequency Control: Crystal

Low Power Indicator

Pushbutton Jammed Detector

Operation Range: Up to ~328 feet (100 meters)

Operating Temperature: -49°F ~ 176°F

(-45°C ~ +80°C)

Power Consumption: about 10mW

Structure: Nylon and Glass Fiber

Shock Resistant

Function Programmable



400 Series



400 Series has unique and outstanding features and is fully programmable. Best use: Monorail, Electric Chain Hoist, Bridge Crane and Jib Crane. 2-motion, 2-speed Model 4004 and 3-motion 1-speed Model 4008 have positive detent positions, e-stop switch, and removable key.

Transmitter Specifications:

L x W x H: 6.42" x 1.93" x 1.77"
(163 x 49 x 45 mm)

Weight: 0.55 lbs. (0.3 kg) *with batteries
Two (2) AA size batteries

General Specifications:

Frequency Control: Crystal

Low Power Indicator

Pushbutton Jammed Detector

Operation Range: Up to ~328 feet (100 meters)

Operation Temperature: -49°F ~ 176°F

(-45°C ~ +80°C)

Power Consumption: about 10mW

Structure: Nylon and Glass Fiber

Shock Resistant

Function Programmable

Receiver Specifications:

L x W x H: 6.34" x 2.91" x 2.05"
(161 x 74 x 52 mm)

Weight: 2.43 lbs. (1.1 kg) *without cable

Input Voltage: AC Type 24/48/110/220/380V;

DC Type: 12~24V

500 Series

500 Series has unique and outstanding features and is fully programmable. Best use: Overhead Crane and most Heavy Loading Equipment.

The 500 Series Model 5008 is a 2-speed transmitter with eight buttons for control of 3-4 motions. FCC 310-320 Mhz AC models only. Each kit includes receiver, one or two transmitters, four batteries, strap, legend sheet for each transmitter, spare key, spare fuse kit, and instruction manual. This radio has programmable operation.

The 500 Series Model 50011 is a 2-speed transmitter with eleven buttons for control of up to 5 motions. FCC 310-320 Mhz AC models only. Each kit includes receiver, one or two transmitters, four batteries, strap, legend sheet for each transmitter, spare key, spare fuse kit, and instruction manual. This radio has programmable operation.



Transmitter Specifications:

5008: L x W X H: 6.42" x 1.93" x 1.77" (163 x 49 x 45 mm)

Weight: 0.61 lbs. (0.3 kg) *with two (2) AA size batteries

50011: L x W X H: 10.79" x 3.03" x 1.65" (274 x 77 x 42 mm)

Weight: 1.19 lbs. (0.5 kg) *with four (4) AA size batteries

General Specifications:

Frequency Control: Crystal

Low Power Indicator

Pushbutton Jammed Detector

Operation Range: Up to ~328 feet (100 meters)

Operating Temperature: -49°F ~ 176°F (-45°C ~ +80°C)

Receiver Specifications:

5008: L x W X H: 6.58" x 6.06" x 3.47" (167 x 154 x 88 mm)

Weight: 3.09 lbs. (1.4 kg) *without cable

Input Voltage: AC Type: 24/48/110/220/380V;

DC Type: 12~24V

50011: L x W X H: 9.96" x 10.51" x 5.91" (253 x 267 x 150 mm)

Weight: 6.61 lbs. (3.0 kg) *without cable

Input Voltage: AC Type: 24/48/110/220/380V;

DC Type: 12~24V

Power Consumption: about 10mW


Structure: Nylon and Glass Fiber

Shock Resistant

Function Programmable

(500 SERIES : MODEL 5008AB)

Transmitter Configuration

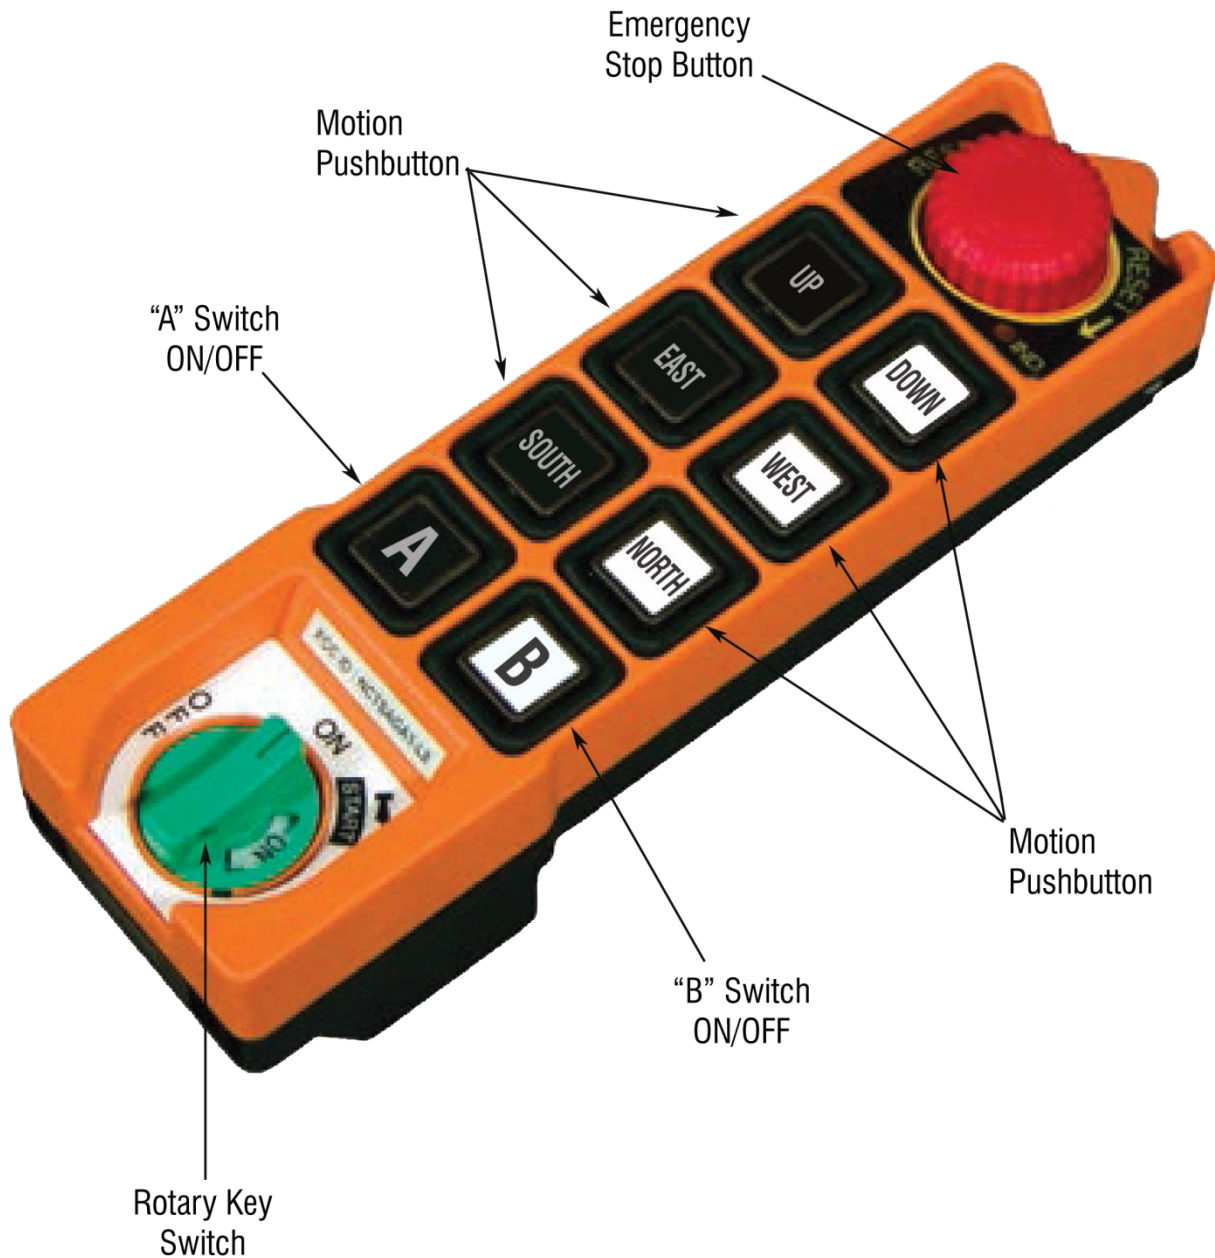

(500 SERIES : MODEL 50011AB)

Transmitter Configuration

