



BINDER LOAD RATCHET WITH GRAB HOOK Model RLB

Features

- Safety, reliable design for easy operation.
- High quality drop forged construction.
- Heat treated for extra strength.
- No requirement for locking of handle.
- Short reach hooks provide optimum take-up.
- Each binder individually proof tested.
- Corrosion resistant baked enamel finish.




Binder Load Ratchet

- Provides easy, secure tightening and quick-release of loads.
- Ideal for use with chains.
- Ratcheting action applies high tension with less effort.



689 S.W. 7th Terrace
Dania, FL 33004
(954) 367-6116
www.acihoist.com

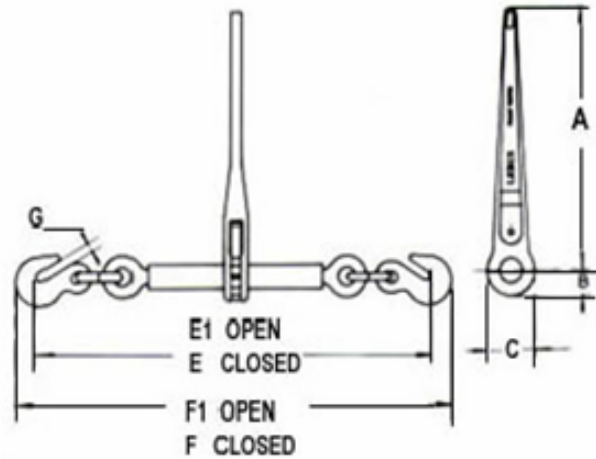

| SPECIFICATIONS – TABLE 1 | | | | | |
|---|-------------------------|-------------------------|-----------------|----------------------------|-------------------|
| Binder Load Ratchet with Grab Hook | | | | | |
| Model No. | Min-Max Chain Size (in) | Working Load Limit (lb) | Proof Load (lb) | Minimum Ultimate Load (lb) | Weight /Each (lb) |
| RL-026 | 1/4 - 5/16 | 2600 | 5200 | 9200 | 3.52 |
| RL-054 | 5/16 – 3/8 | 5400 | 10800 | 19000 | 10.50 |
| RL-092 | 3/8 – 1/2 | 9200 | 18400 | 33000 | 12.90 |
| RL-130 | 1/2 – 5/8 | 13000 | 26000 | 46000 | 14.38 |

| DIMENSIONAL DRAWING – TABLE 2 | | | | | | | | | |
|---|--------------------|--------------------|------|------|-------|-------|-------|-------|------|
| Binder Load Ratchet with Grab Hook | | | | | | | | | |
| Model No. | Handle Length (in) | Handle Length (in) | | | | | | | |
| | | A | B | C | E | E1 | F | F1 | G |
| RL-026 | 7.16 | 7.16 | 0.89 | 1.77 | 16.22 | 21.26 | 17.79 | 22.83 | 0.35 |
| RL-054 | 13.92 | 13.92 | 1.30 | 2.60 | 22.64 | 30.64 | 25.25 | 33.24 | 0.51 |
| RL-092 | 13.92 | 13.92 | 1.30 | 2.60 | 24.13 | 32.13 | 27.04 | 35.04 | 0.59 |
| RL-130 | 13.92 | 13.92 | 1.30 | 2.60 | 26.45 | 34.45 | 30.07 | 38.07 | 0.74 |