



Features


- Capacity range from 0.75 to 6 ton
- LH series is a universal manual hoist for lifting, tensioning, and lashing in any direction.
- Lightweight and small mounting sizes and small lever force at full load.
- Hand lever operates with little effort due to optimal gear ratio.
- The hoist is fitted with high grade aloy chain.
- Drop forged steel suspension & load hooks are heat treated and fracture resistant.
- Top and bottom hooks are fitted with safety latches as standard.

Hoist Construction

The steel body Lever Hoist/Puller is a dependable way to accurately position, load, and lift heavy, freely suspended loads within the hoist's rated load. The reversing lever and free-chain wheel provide ease of control even with work gloves. The hoist can be used in confined spaces due to the short handle and low handle chair.

Lever Hoists



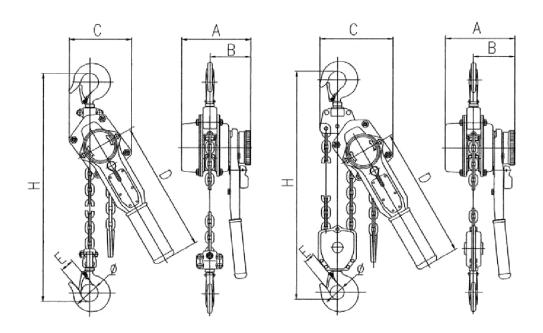

LEVER HOIST SPECIFICATIONS

Model		LH-015	LH-030	LH-060	LH-120
Capacity (tons)		3/4	1 1/2	3	6
No. of columns of load chain		1	1	1	2
Handle pull rated loads (lbs)		60	66	75	83
Distance (in)	Α	5.83	6.81	7.87	7.87
	В	3.43	3.90	4.41	4.41
	С	5.20	5.71	7.83	9.06
	D	10.94	14.88	15.28	15.28
	E	1.1	1.3	1.6	1.7
	Ø	1.40	1.67	1.97	2.09
	н	13.0	15.7	20.5	25.2
Net weight (lbs.) for 5 ft lift		15.21	24.0	45.6	62.0
Packing measurement (in)		15 x 5 x 6.7	18.9 x 5.1 x 7.9	21.8 x 7.3 x 8.9	21.8 x 7.9 x 8.9
Extra weight per feet of extra lift (lbs.)		0.53	0.94	1.48	2.96

PAGE: 2